



Large, Stackable Shaker

Increased throughput & increased yields with
Innova® 44/44R Incubated Shaker

Tight temperature, speed and balance control: Temperature accuracy and uniformity: ± 0.1 °C and ± 0.25 °C, notification at ± 0.5 °C deviation; speed control: ± 1 rpm and notification at ± 5 rpm deviation; automatic imbalance detection

Easy door and platform handling: The space-saving door glides up and out of your way for easy access to all samples and easy service

De-centralized cooling: Every refrigerated device (-20 °C/ -34 °F below ambient) in a stack comes with its own integrated cooling unit, significantly lowering the impact in the unlikely case of failure



Saves money: No internal HEPA-filter that must be replaced annually to ensure sufficient airflow

Smart shaker drive control: Smooth acceleration and deceleration avoid splashing and mechanical damage; for safety, shaker stops, if door is opened or excessive imbalance

Programming: Continuous, timed, or multi-step programs with up to 15 steps, four programs storable

Cross-contamination control: Optional airflow UV-germicidal light outside the chamber

The Workhorse for Your Lab


Incubated, refrigerated and stackable up to three high
The Innova 44 and Innova 44R stackable incubator shakers both feature the Eppendorf triple-eccentric counterbalanced drive and are a time-proven enabler for many scientists around the world. These incubator shakers provide years of dependable operation. The cast iron support and counter balanced drive is specifically designed to enable high speed applications and heavy workloads. Innova 44/44R incubator shakers provide broad temperature capabilities and options for culturing a wide variety of organisms. The height clearance and platform size allows for multiple cultures in typical 5 L flasks.

Recommended applications:

- > Cultivation of (thermophile) bacteria, yeast, fungi, insect cells, e.g. for protein expression
- > Cultivation of algae of plant cells (photosynthetic light bank optional)
- > Media optimization
- > Mixing and shaking of samples (e.g. for staining, washing, extraction or hybridisation)
- > Solubility studies



Best fit for your lab needs: Three positioning bases are available: 10 cm, 30 cm, or 40 cm (4 in, 12 in, or 16 in)

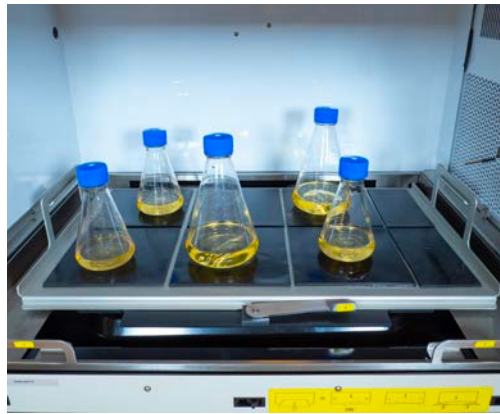

Flexibility for various vessel formats: Various accessories are available including a sticky pad platform for low-speed shaking of flat bottom vessels.



Vibration- and trouble-free operation for years: Three weight-supporting shafts, nine permanently lubricated ball bearings and the large platform bearing surface support the platform load



Spill protected and easy to clean: The Innova triple-eccentric drive is protected from spills by the unique drainable spill pan with rounded corners. The spill pan can also be used as water reservoir to reduced medium evaporation.



Fast and easy service: A service drawer ensures quick access to all electronic and heating/cooling components without the need to move or unstack the shaker.




Everything at a glance: The large 240x128 backlit LCD display lets you check on actual readings and set points even from a distance. In addition to standard parameters, the relative humidity can be displayed if the optional Humidity Monitor is installed.

Find vessel capacities and the right accessory for your vessel format and application, along with detailed specifications and information!



Eppendorf Shaker Accessory Guide
www.eppendorf.com/shaker-accessory-guide



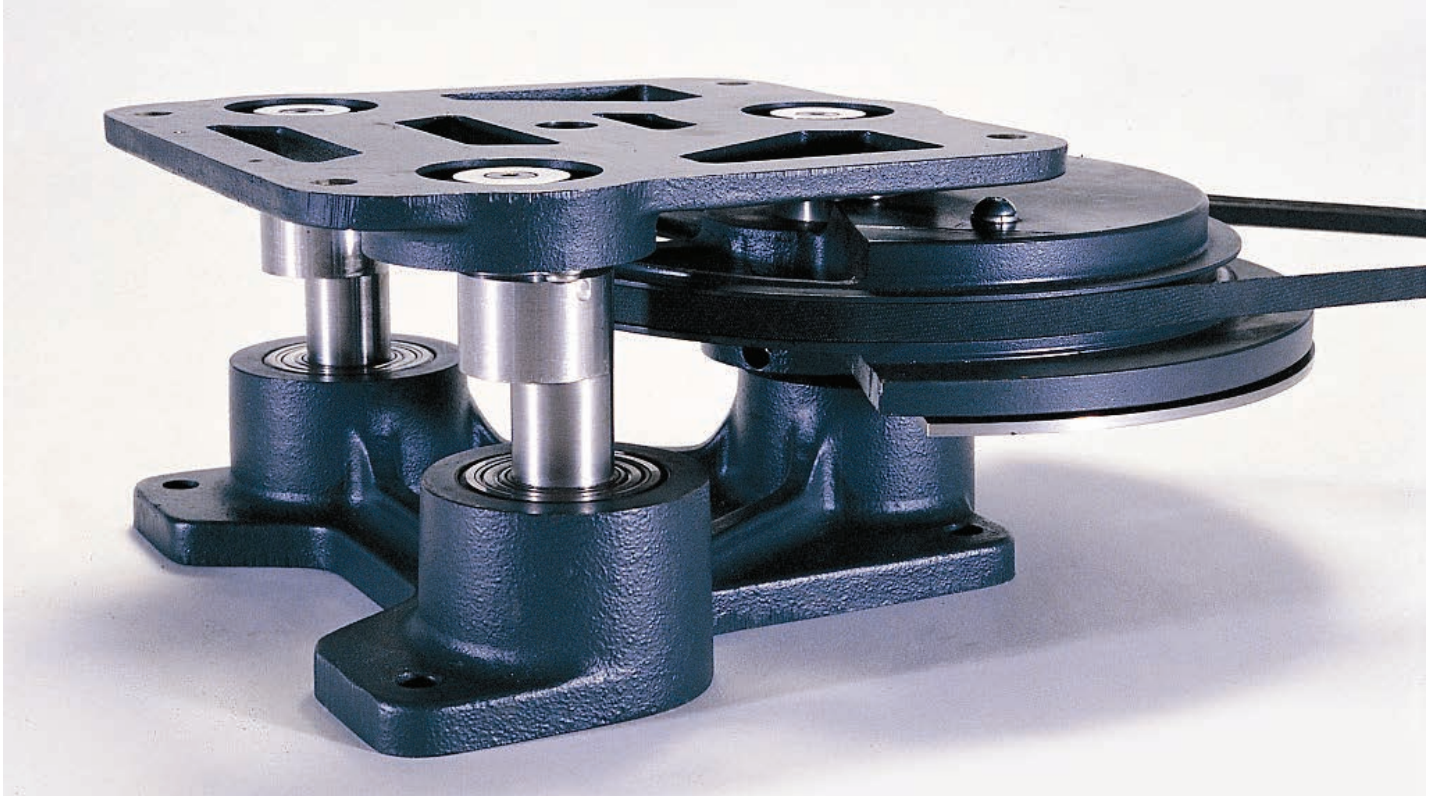

Built to Perform & Last

Unexpected downtime and late results are not an option for you? And do you have more important things to do than organize repair for your benchtop orbital shaker over the weekend? Since its introduction more than 50 years ago, the cast iron triple-eccentric drive from Eppendorf has been the gold-standard in our shaker drive technology. The heavy-duty construction of the triple-eccentric drive gives you confidence that our shakers will perform to your specifications, even when fully loaded and operating at top speed.



Peace of Mind – Your Service Options

Our Service Agreements – Your Advantages

With our basket of Service Agreement solutions, we take the load off your shoulders by simplifying your ordering and budgeting process for various services over the full lifetime of your instruments.

Your costs become reduced and predictable, thereby assuring continuous productivity and a long service life. In addition, our agreements include repair costs – fully or partially – and discounts on other services.

Eppendorf Service Agreements



Services Agreement	AdvancedCare For assured instrument reliability an uptime	PremiumCare For assured instrument reliability, uptime and financial plannability
Full preventive maintenance	1/year	1/year
Priority support* ¹	■	■
Spare parts, labor, travel on repairs	20% discount	included
Discount on additional services (e.g. IQ/OQ)	10%	10%

*¹ Subject to local business conditions, and based on a »best effort« practise. For more information please contact your local service organization.



Innova® 44/44R

Comparable Shaker #1

Comparable Shaker #2

Capacity and compatibility			
Orbit options	2.5 or 5.1 cm (1 or 2 in)		
Platform size	76 × 46 cm (30 × 18 in)		
Max. flask size	6 L		
Drive type	Triple-eccentric counterbalanced (three shafts to support weight), nine permanently lubricated ball bearings		
Motor type	Solid state brushless DC		
Growth Conditions			
Speed range	25 – 400 rpm with 2.5 cm orbit; 25 – 300 rpm with 5.1 cm orbit or 2 stacked units; 25 – 250 rpm with 3 stacked units		
Speed increment	1 rpm		
Speed accuracy	±1 rpm		
Speed deviation alarm (visible & audible)	±5 rpm		
Temperature range	Incubated: ambient + 10 °C to 80 °C; Refrigerated: ambient -20 °C (min. 4 °C) to 80 °C (max. 70 °C with PS-light, 60 °C with rH-monitoring).		
Temperature increment	0.1 °C		
Ambient temperature	10 – 35 °C		
Temperature accuracy	±0.1 °C (at 30–40 °C)		
Temperature deviation alarm (Visible & audible)	±1 °C (heat turns off to regulate to setpoint, additional independent over-temperature cutoff included)		
Power outage behavior	Automatic restart to last setpoints after power is restored, indicated by flashing display		
Handling, Ergonomics, Service			
Programming of temperature or speed	Yes (15 steps, 4 programs storable)		
User interface	Large LCD display (12.5 × 6.5 cm/ 4.9 × 2.6 in), display of setpoint and actual values		
Logging of chamber temperature, rpm, and alarms, remote parameter and status monitoring, alarm notifications via email or SMS	Yes, via RS-232 interface combined with VisioNize® Lab Suite (VisioNize® box required)*		
Sound pressure	<65 dbA		
Weight & Dimensions			
Weight, incubated / refrigerated	181 / 188kg (400 /415 lbs)		
Dimensions (W × D × H)	118.2 × 86.9 × 63 cm (46.5 × 34.2 × 24.8 in)		

*Check availability in your country

Ordering information

Description	Order no.
New Brunswick Innova® 44	
stackable up to 3-fold, orbit 2.5 cm (1 in)	see online*
stackable up to 3-fold, orbit 5.1 cm (2 in)	see online*
New Brunswick Innova® 44R	
refrigerated, stackable up to 3-fold, orbit 2.5 cm (1 in)	see online*
refrigerated, stackable up to 3-fold, orbit 5.1 cm (2 in)	see online*
Stacking kit , for stacking one additional 44 or 44R (3 × Innova® 44/44R can be placed in a single stack)	M1282-0500
Universal platform for Innova® 44/44R , 76 × 46 cm (30 × 18 in), not interchangeable with other 76 × 46 cm platforms	M1282-9904
Aluminum platform for Innova® 44/44R , 76 × 46 cm (30 × 18 in), not interchangeable with other 76 × 46 cm platforms	
125 mL Erlenmeyer flask dedicated platform	M1282-9905
250 mL Erlenmeyer flask dedicated platform	M1282-9906
500 mL Erlenmeyer flask dedicated platform	M1282-9907
1 L Erlenmeyer flask dedicated platform	M1282-9908
2 L Erlenmeyer flask dedicated platform for Innova® 44 , 76 × 46 cm (30 × 18 in), 12 clamps, aluminum, for 2 L wide neck Erlenmeyer flasks (DIN-ISO 24450), bottom diameter ~153 mm. For 2 L narrow neck Erlenmeyer, Thomson, or Corning flasks (DIN-ISO 1773) bottom diameter ~166 mm, please refer to universal platform and clamps M1190-9004	M1282-9909
Shaker clamps, microplate racks and test tube racks	see online*
Sticky pad platform for Innova® 44(R) , 76 × 46 cm (30 × 18 in), 7 sticky pads necessary to cover platform (sold separately, order no: M1250-9700, cutting required), anodized aluminum	M1282-9913
Sticky pad adapter kit	M1250-9504
Sticky pad	M1250-9700
Heavy duty 0.95 cm-thick aluminum plate platform for Innova® 44/44R only , 76 × 46 cm (30 × 18 in), not interchangeable with other 76 × 46 cm platforms. Heavy-duty platforms are recommended for shaking full loads of flasks, 1 L and larger, containing more than 20 % volume or with baffles.	
Heavy duty universal platform	M1282-9915
Positioning bases , increases the height of the shaker for easier access, mandatory for stacked shakers	
for Innova® 44/44R, 10.2 cm, short	M1282-0600
for Innova® 44/44R, 30.5 cm, medium	M1282-0800
for Innova® 44/44R, 40.6 cm, tall	M1282-0700
12-port gassing manifold , for Innova® 44R - contact Eppendorf for installation options	M1282-0291
Humidity monitor , for Innova® 44R - contact Eppendorf for installation options	M1282-5011
UV germicidal light , for Innova® 44R - contact Eppendorf for installation options	M1282-9921
Photosynthetic light bank , for Innova® 44R - contact Eppendorf for installation options	M1282-9922
Remote alarm option , for Innova® 44/44, Innova® 43/43, Innova® 42/42 or Innova® 40/40	M1320-8029
VisioNize® Lab Suite (VisioNize® box required) , remote parameter and status monitoring, alarm notifications via email or SMS, response-based alarm escalation + more. Check availability in your country – sign up and connect 3 devices for free.	Sign up online

*To find the correct order number for your country, please check www.eppendorf.com/shakers or contact your local sales representative.

Looking for *Service Agreements* including annual full preventive maintenance or IQ/OQ GxP qualification services?
Contact your Eppendorf representative



Ready for the future of your lab

The Innova 44/44R is the perfect starting point to significantly increase the shaking capacity and application potential of your lab - with our latest stackable shaker, the Innova S44i. It offers even greater capacity and can be easily stacked on top of an existing Innova 44. The S44i also comes with more advanced programming, enhanced ergonomics, more comprehensive documentation, and user management.

[Compare the Innova S44i with the Innova 44/44R](#)



Your local distributor: www.eppendorf.com/contact
Eppendorf SE · Barkhausenweg 1 · 22339 Hamburg
eppendorf@eppendorf.com · www.eppendorf.com

www.eppendorf.com