



New Brunswick OP-76

OPTICAL pH MODULE


# Total Convenience

Use the optical pH sensors of the BioBLU® Single-Use Bioreactors

Monitor and control the optical pH signal of your BioBLU Single-Use Bioreactor using your existing bioreactor controller. The OP-76 Optical pH Module, designed to work with our BioBLU Single-Use Bioreactor adaptor kits, eliminates autoclaving and under-the-hood insertion of pH sensors to

further reduce setup time and costs. BioBLU Single-Use Bioreactor adaptor kits are compatible with current Eppendorf small scale and bench scale bioprocess controllers, Eppendorf legacy bioprocess controllers, and selected 3rd party bioprocess controllers.

# OP-76 Optical pH Module

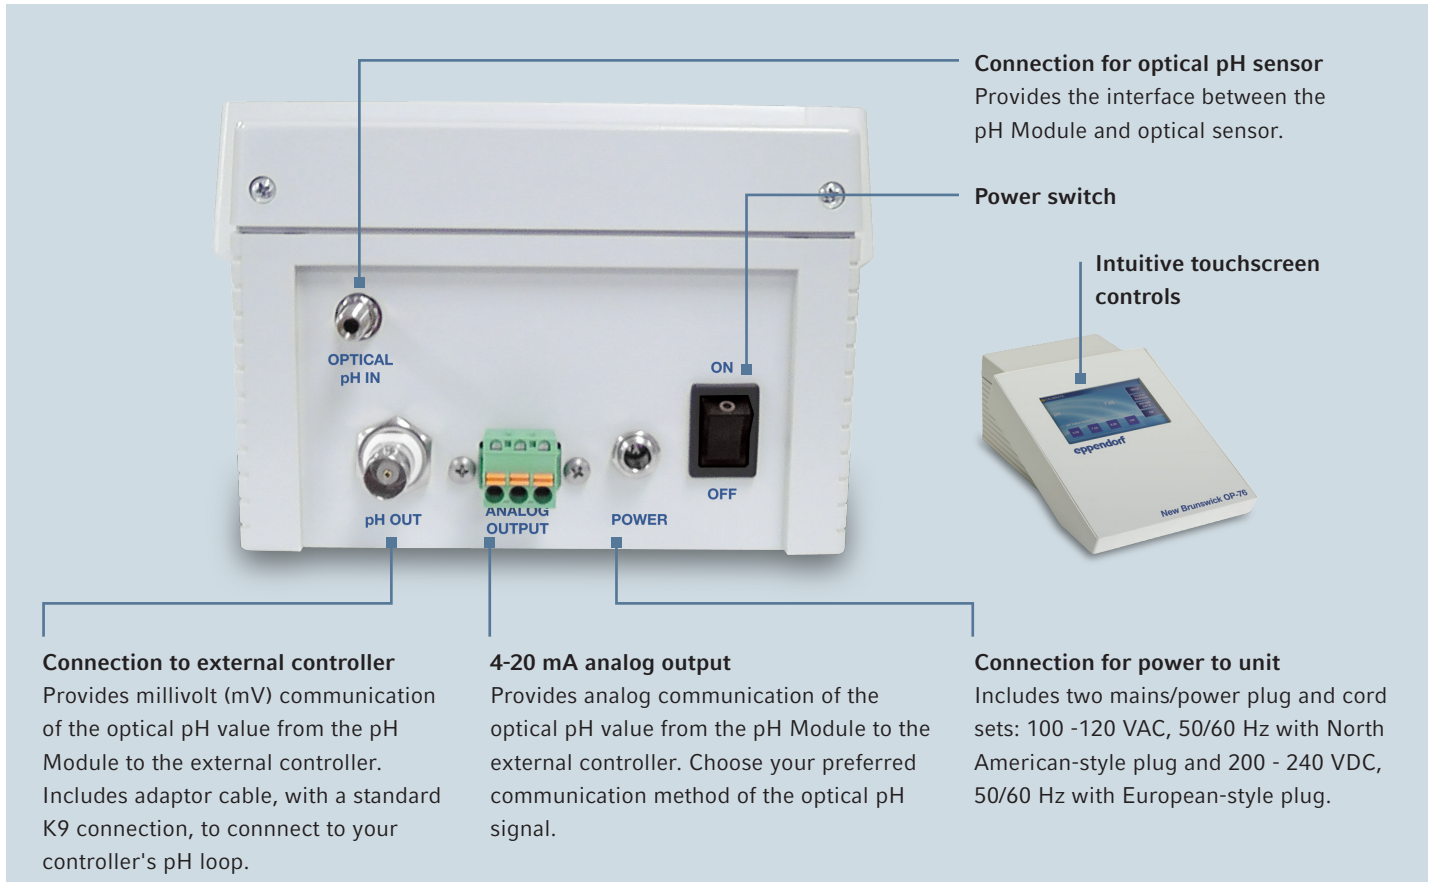

The OP-76 Optical pH Module and BioBLU Single-Use Bioreactor adaptor kits are compatible with the following cell culture systems:

- > DASbox® Mini Bioreactor System
- > DASGIP® Parallel Bioreactor System
- > SciVario® twin
- > BioFlo® 120
- > BioFlo 320
- > CelliGen 310
- > BioFlo/CelliGen 115

### Ordering information

Order no.	Description
M1376-1001	OP-76 Optical pH Module (Optical pH sensors sold separately)

### Technical Specifications

pH measurement range	6 - 8 (optical sensor)
Dimensions (H x W x D)	274 x 289 x 168 mm (10.79 x 11.36 x 6.61 in)
Electrical requirements	12 VDC @ 18 W, 1.5 Amps maximum
Weight	1.1 kg (2.44 lbs)

Your local distributor: [www.eppendorf.com/contact](http://www.eppendorf.com/contact)  
Eppendorf SE · Barkhausenweg 1 · 22339 Hamburg · Germany  
[eppendorf@eppendorf.com](mailto:eppendorf@eppendorf.com)

[www.eppendorf.com/bioprocess](http://www.eppendorf.com/bioprocess)